



Side & Over Panel Options

SUITABLE FOR INTERNAL
AND EXTERNAL USE

- EMERGENCY EXITS
- PERSONNEL DOORS

TECHNICAL SPECIFICATION

Single & Double Glazed Available

6mm Toughened Glass

Glazed side panels up to 1140mm high


Solid over panels up to 2800mm width

Door pictured is
outward opening



Fixed solid over panels can be made up to 2800mm in one direction and up to 970mm in the other direction. Measurements above can be applied to either width x height or height x width. For over-panels outside these dimensions please contact the sales team.

Side & Over Panel Options

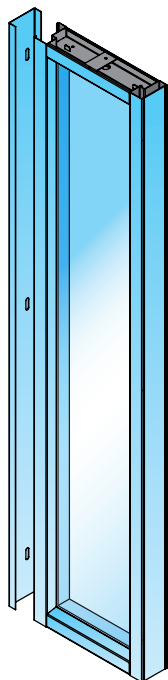

SOLID OVER PANEL DIMENSIONS	
width range (mm)	height range (mm)
from 300 to 2800	from 300 to 970

Can be fitted to fire rated doors to a max over-panel height of 1000mm - FD240. Max size for fire rated over panel is 1000mm high and up to the width of a double door-set with NO side panel

REMOVABLE SOLID OVER PANEL DIMENSIONS	
width range (mm)	height range (mm)
from 300 to 2500	from 300 to 1140

Only available on outward opening doors. Max height for removable over panel and door combinations is 3000mm. Max width of structural opening is 2500mm. Can be fitted to fire rated doors to a max over-panel height of 1000mm - FD240. Max fire rated over panel is 1000mm high and up to the width of a double door-set with NO side panel

SOLID SIDE PANEL DIMENSIONS	
width range (mm)	height range (mm)
from 300 to 970	from 300 to 2800

Can be fitted to fire rated doors. Up to 1000mm wide - one or both sides of the door-set. Door leaves must be latched and / or flush bolted. Cannot be used in combination with a top panel.


GLAZED TOP AND SIDE PANELS DIMENSIONS	
width range (mm)	height range (mm)
from 300 to 2500	from 300 to 1140

Not fire-rated. Options for single and double glazed units and independent panels not connected to the door as an additional item.


Glazed side panel

Single and double glazed side and over panels can be manufactured to size with your choice of glazing as follows:

- 6mm GWPP/ 6.4mm Laminated / 6mm Toughened / 9mm Ceramic.
- Obscured and frosted options on request.
- 22mm Double Glazed units.

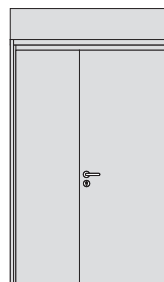


Solid over-panel

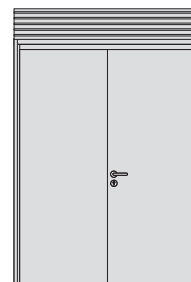


Louvred over-panel




Glazed over-panel

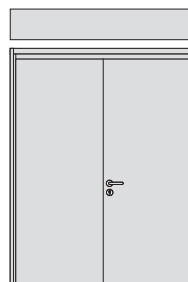



Detachable over-panel

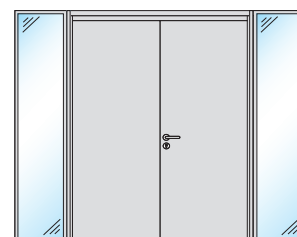


Glazed side-panels

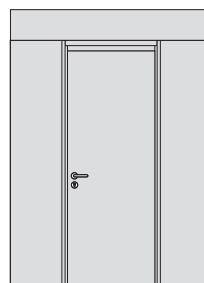

Solid over-panel and side-panels

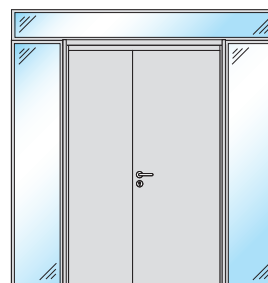

Solid side-panels



Louvred side-panel