

TILT AND TURN WINDOW



FEATURES

> **ELEGANT AESTHETICS**

Slim and modern aluminium frames with sightlines starting from just 97mm

> **ENERGY EFFICIENT**

58mm thermally broken frame

HEIGHTENED SECURITY

PAS 24 and Secured By Design Certified, and in compliance with Part Q of the building regulations

FLEXIBLE CONFIGURATIONS

Choose from tilt before turn, tilt only, Life-Time Homes (LTH), or multi-light configurations



GLAZING OPTIONS


Internal or External Glazed with 28mm to 40mm glazing thickness



CHOICE OF FINISH

Available in any single RAL colour, dual colour, textured or an anodised finish

TECHNICAL DRAWINGS

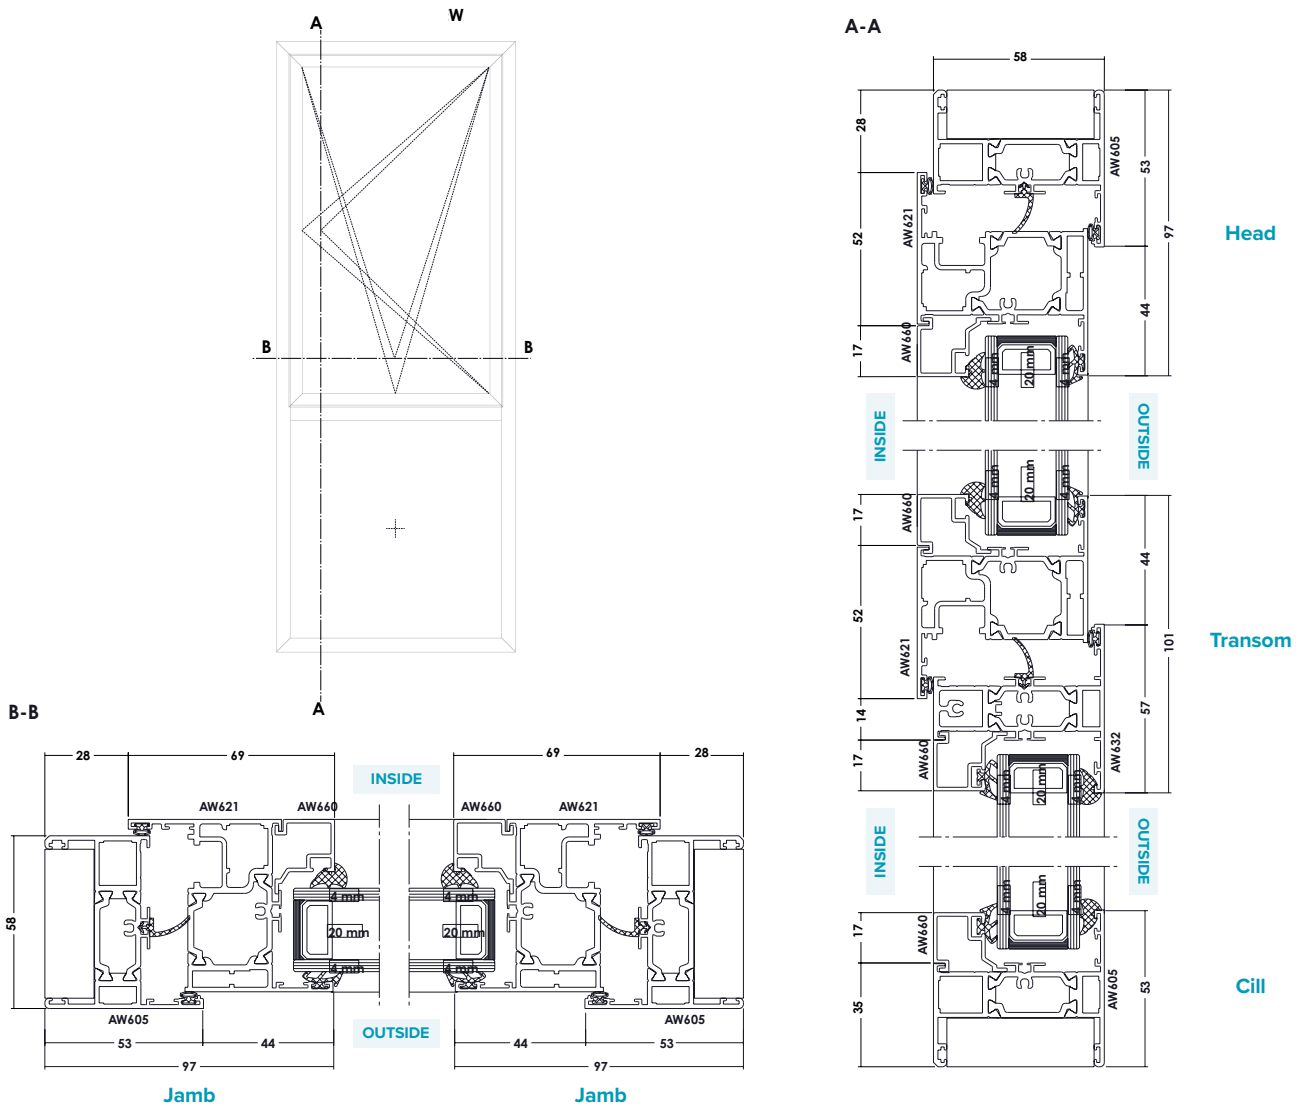

SIZE & WEIGHT LIMITS	
Tilt & Turn	
Max Width	1725mm
Max Height	2300mm
Max Weight (Ratio H x W 3:1)	150kg
Fixed Light	
Max Width	2500mm
Max Height	2500mm
Max Weight	250kg

PERFORMANCE	
U-Value (Double Glazing)	(Ug: 1.0 W/m ² K) 1.5 W/m ² K
U-Value (Triple Glazing)	(Ug: 0.7 W/m ² K) 1.3 W/m ² K
Window Energy Rating (WER)	B-C
BRE Green Guide Rating	A rated
Air Permeability	Class 4 (600 Pa)
Water Tightness	Class 8a (450pa)
Wind Resistance	Class E2400 (2400 Pa)
Acoustic Performance	Rw (C;Ctr) 44 (-1;-4) dB
Security	PAS 24 & SBD
3rd Party Certification Q Mark	✓

SIGHTLINES	
Head	97mm
Cill	53mm
Jamb	97mm
Transom	101mm

OPTIONS	
Single Colour	✓
Dual Colour	✓
Textured Finish	✓
Anodised Finish	✓

DETAILS	
Frame Depth	58mm
Glazing Thickness	28-40mm